



PROJECT NAME

CATALOG NO.

TYPE

DATE

NOTE

LINEAR LED STRIP

ILL-S2 Series

Linear Luminaires

DESCRIPTION

The Alphalite ILL Series makes it an ideal choice for size restricted architecture applications. The ILL Series can be the illumination solution in commercial, industrial, retail and residential applications. Fixtures can be used in storage/utility areas, coves, display cases, shops, task and general area lighting.

APPLICATION

Versatile solution for general purpose applications. Ideal for parking garages, corridors, hallways, stairwells, offices, closets, storage rooms, warehouse, manufacturing facilities, and spaces that demand energy demand reduction and high quality light.



SPECIFICATION FEATURES

Benefits

- Lower installation costs and maintenance costs
- Attractive ROI
- Ideal for use with sensors and advanced controls
- Lower energy costs
- High quality light for a more productive space
- Convenient access to replaceable, standard components reduces life cycle costs

Construction

Reflector utilizes highly reflective powder coat finish. Diffuser lens provides even and consistent light while eliminating pixelation. Tool-less removal of diffuser allows access to LED array. LED module and driver are replaceable. Housing and optics maintain damp location rating with all internal components.

Finish

Highly reflective finish. Baked white paint, applied after fabrication.

Electrical

Luminaire utilizes long life, high efficacy LEDs and a highly efficient, reliable LED driver. 120V-277V input voltage for increased versatility. 0-10V continuous dimming comes standard. Ideal when used in conjunction with controls and sensors. Comes equipped with quick disconnect for compliance with US code.

Optics

The ILL's LED light engine and integrated optics delivers enhanced light quality and distribution. Precision-formed diffuser and reflector are designed LED light consistently, reducing glare and pixelation.

Certifications / Regulatory

All components used have UL approval. UL Class 2. Power supply: SCP, OTP, OVP protection, FCC Part 15 Class B, UL8750 Class 2.

Warranty

7-year limited warranty. See complete warranty terms for details.

Quick Ship Product

- ILL-2L(20S2)/840
- ILL-4L(25S2)/835
- ILL-4L(25S2)/840
- ILL-4L(25S2)/850
- ILL-4H(35S2)/840
- ILL-4H(35S2)/850
- ILL-4VH(45S2)/840
- ILL-4VH(45S2)/850
- ILL-8L(54/46/38S2)/840
- ILL-8L(54/46/38S2)/850
- ILL-8H(90/75/65S2)/840
- ILL-8H(90/75/65S2)/850

ORDERING INFORMATION

Sample Number: ILL-8H(65S2)/840

ILL	8	H	8	40	(Blank)	(Blank)
Series	Form Factor	Lumen Package	CRI	CCT	Input Voltage	Dimming
ILL - Linear LED Strip	2 - 2' 4 - 4' 8 - 8'	VL - Very Low Wattage L - Low Wattage H - High Lumen VH - Very High Lumen *See energy data for details	8 - 82+ CRI	35 - 3500K 40 - 4000K 50 - 5000K A - Adjustable CCT (5000/4000/3500K)	(Blank) - 120V-277V	(Blank) - 0-10V Continuous Dimming

Options

Accessories

- WG - Wire Guard
- WIEC-18/5 - Quick Disconnect Wiring
- ZCN - End Connector

Controls

- PIR - On/off PIR High Bay motion sensor
- PIRD - On/off PIR high bay motion and daylight sensor
- MMS - Integrated step dimming microwave motion sensor
- DL - Integrated daylight harvesting
- SMC - Smart Control System
- OS - Step dimming PIR motion sensor and daylight sensor. (Requires OS-618-RC101 Sensor Configuration Tool. Not included)
- DC - Dual Circuit

Emergency Backup

- (Lumen will maintain over the 90-minute duration)
- EM700 - 700lm
- EM1400 - 1400lm
- EM2000 - 2000lm

Assembly in USA

- BAA - Assembly in USA



10715 Springdale Ave, Suite 4, Santa Fe Springs, CA 90670
Tel: 888.287.9228 | Fax: 888.258.9183 | support@alphalite.com | alphalite.com

SUMMARY


Input Voltage	120V-277V
Input Power	See energy data for details
Power Factor	> 0.90
THD (Max.)	20%
Efficacy	> 130 LPW
Delivered Lumens	See energy data for details
Controls/ Dimming	Full Range 0-10V dimming standard
Dimming Range	10-100%
CRI	> 82
CCT	3500K, 4000K, 5000K
Operating Temp.	-20- +55C
Rated Life	70,000 hours

ENERGY PERFORMANCE DATA

Form Factor	Part No.	Rated Wattage (W)	Tested Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)		
8'	ILL-8L(54/46/38S2)/835	54/ 46/ 38	54/ 46/ 38	7020/ 5980/ 4940	130		
	ILL-8L(54/46/38S2)/840						
	ILL-8L(54/46/38S2)/850						
	8'	ILL-8H(65S2)/835	65	65	8450	130	
		ILL-8H(65S2)/840			8515	131	
		ILL-8H(65S2)/850			8580	132	
	4'	ILL-8H(90/75/65S2)/835	90/ 75/ 65	90/ 75/ 65	11700/ 9750/ 8450	130	
		ILL-8H(90/75/65S2)/840					
		ILL-8H(90/75/65S2)/850					
		4'	ILL-4VL(18S2)/835	18	19	2484	138
ILL-4VL(18S2)/840			2502			139	
ILL-4VL(18S2)/850			2520			140	
4'			ILL-4L(25S2)/835	25	25	3275	131
			ILL-4L(25S2)/840			3300	132
			ILL-4L(25S2)/850			3325	133
4'			ILL-4H(35S2)/835	35	34	4550	130
	ILL-4H(35S2)/840		4585			131	
	ILL-4H(35S2)/850		4620			132	
4'	ILL-4H(35/25/18S2)		35/25/18	35/25/18	4585/3250/2358	130+	
	ILL-4VH(45S2)/835		45	40	5850	130	
	ILL-4VH(45S2)/840				5895	131	
	ILL-4VH(45S2)/850				5940	132	
	4'		ILL-4VH(62S2)/835	62	62	8000	129
			ILL-4VH(62S2)/840			8060	130
ILL-4VH(62S2)/850		8122	131				
4'	ILL-4VH(64/56/46S2)	64/56/46	64/56/46	8000/7000/5750	125		
	2'	ILL-2L(20S2)/835	20	19	2463	130	
		ILL-2L(20S2)/840			2600	130	
ILL-2L(20S2)/850		2620			131		

PHYSICAL PARAMETERS


DIMENSION

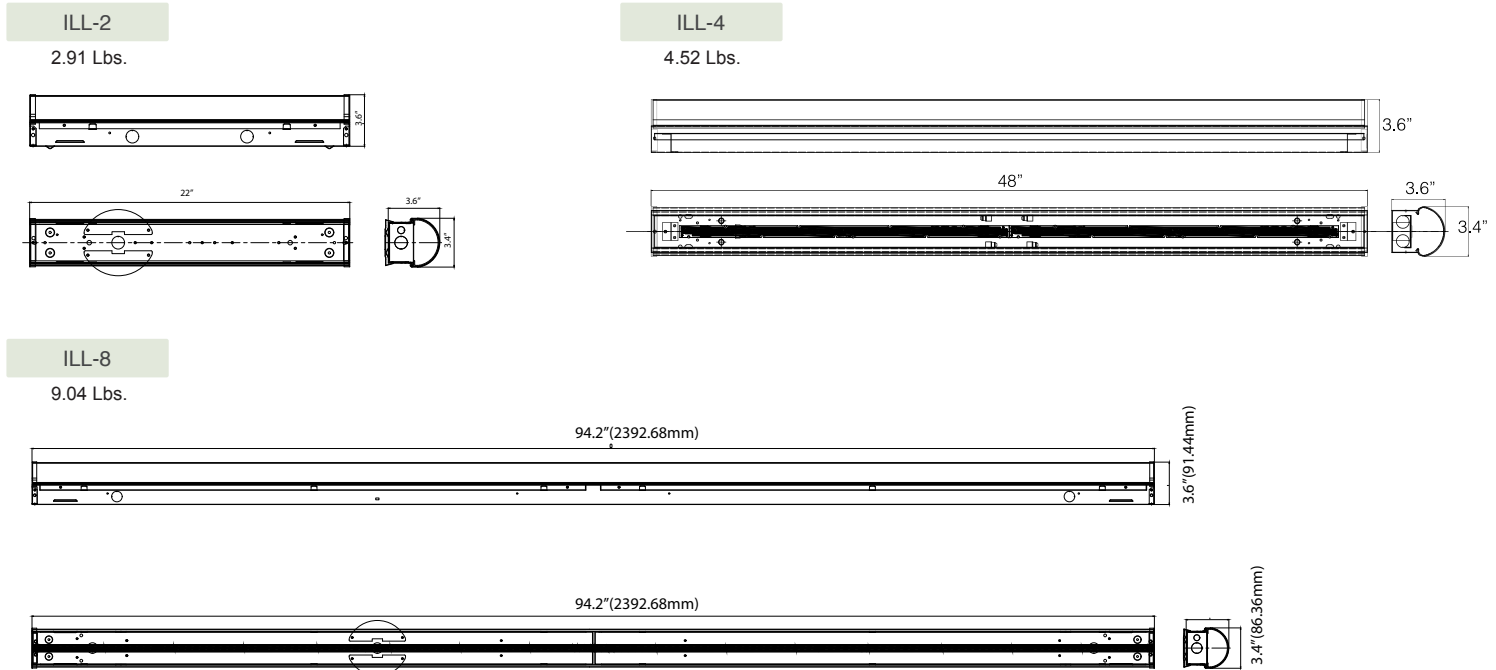

MOUNTING INFORMATION

ILL-S2 Series

- 1: Surface/wall Mount
- 2: Junction Box Mount
- 3: Suspension Mount
- 4: Chain Mount
- 5: Pendant Mount

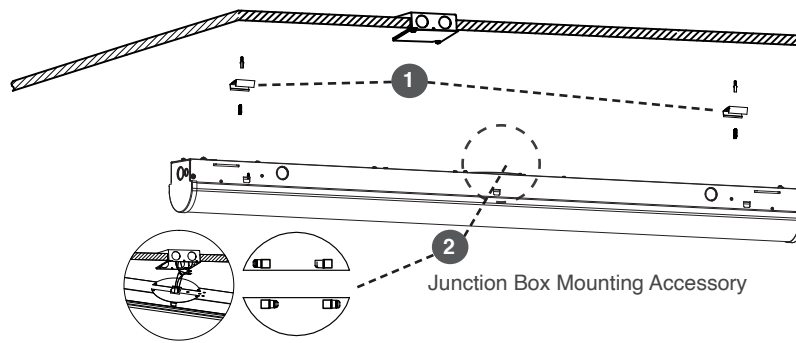

CONTROL OPTION

-DMMS/MMS control pre-commissioning

Sample Number: -MMS (5-3M-L3-S10M)

10	3M	L3	S10M	(Blank)
Detection Area 5 - 50% 1 - 10%	Hold Time 20M - 20 min. 3M - 3 min. 90S - 90 sec. 30S - 30 sec. 5S - 5 sec. N - ∞	Low Mode L5 - 50% L3 - 30% L2 - 20% L1 - 10%	Stand-by Period SN - ∞ S1H - 1 hr. S30M - 30 min. S10M - 10 min. S5M - 5 min. S5S - 5 sec. (Blank) - Disable	Daylight Sensor (Blank) - Disable D100 - 100 lux D50 - 50 lux D25 - 25 lux D10 - 10 lux D5 - 5 lux D2 - 2 lux
<p>Detection Area: Detection area can be reduced to fit precisely each application.</p> <p>Hold Time: The time period the luminaire remains at 100% illumination after no motion detected.</p> <p>Low Mode: The selected low light level after the hold time.</p> <p>Stand-by Period: The time period the luminaire remains at "Low Mode" before it completely switched off in the long absence of people. When set to "∞" mode, the low light level is maintained until motion is detected.</p> <p>Daylight Sensor: The sensor can be set to only allow the luminaire to illuminate below a defined ambient brightness threshold. When set to "Disable" mode, the daylight sensor will switch on the luminaire when motion is detected regardless of ambient light level.</p> <p>**Noted that daylight sensor is active only when the luminaire switches off**</p>				

-OS control pre-commissioning

Sample Number: -OS (L2-5M-L3-S10M)

L2	(Blank)	5M	L3	S10M	(Blank)	(Blank)	(Blank)
Lens / Coverage L2 - 8'H (48' dia.) L3 - 20'H (40' dia.) L4 - 40'H (60' dia.) L7 - 40'H (100' dia.)	High Mode (Blank) - 100% H9 - 90% H8 - 80% H7 - 70%	Hold Time #M - 1-30 min. 30S - 30 sec.	Low Mode L5 - 50% L3 - 30% L2 - 20% L1 - 10%	Stand-by Period SN - ∞ S#H - 1-5 hrs. S#M - 1-59 min. (Blank) - Disable	Ramp Up (Blank) - Disable #Up - 1-60 sec.	Fade Down (Blank) - Disable #Dn - 1-60 sec.	Photocell On/Off (Blank) - Disable PS - Active
<p>High Mode: The selected high light level when motion detected.</p> <p>Hold Time: Time period the luminaire remains at "High Mode" after no motion detected.</p> <p>Low Mode: The selected low light level after the hold time.</p> <p>Stand-by Period: Time period the luminaire remains at "Low Mode" before it completely switched off in the long absence of people. When set to "∞" mode, the low light level is maintained until motion is detected.</p> <p>Ramp Up: Time period for light level to increase from LOW to HIGH.</p> <p>Fade Down: Time period for light level to decrease from HIGH to LOW.</p> <p>Photocell On/Off: When the light level exceeds this setting, the lights will turn off even when the space is occupied. Once the light level exceeds this setting, the sensor will wait and monitor for a short period of time in order to confirm the light level increase is not temporary before forcing the lights to go off. When light level goes below the settings, the light will turn on even without motion detection. This feature is disabled by default. If using this setting in combination with the Hold Off set-point, there must be at least 10fc of dead band between the two settings. The Photocell set-point is automatically set to maintain at least 10fc of dead band above the Hold time set-point to help avoid load cycling.</p>							