


Remote Control Settings

Button

Function

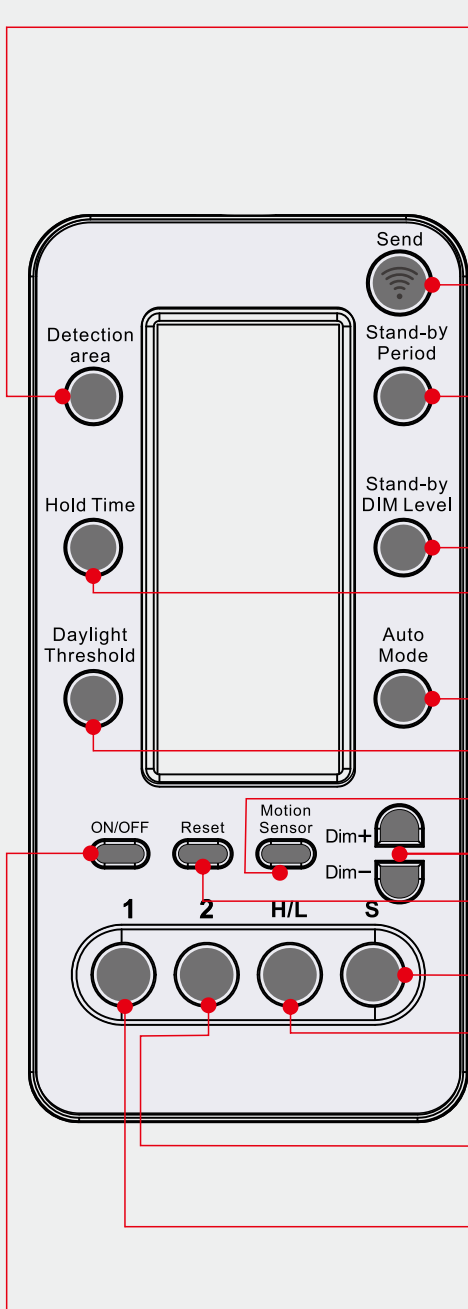

● Detection area

Short press to set detection area :25% / 50% / 75% / 100%, long press 3s to transmit selected value.

● Send

Short press to transmit all selected value on remote screen.

● Stand-by Period

Short press to set standby period 0S / 10S / 1min / 3min / 5min / 10min / 30min / +∞
Long press 3s to transmit selected value

● Stand-by DIM Level

Short press to set stand-by DIM Level 10% / 20% / 30% / 50%.
Long press 3s to transmit selected value

● Hold Time

Short press to set hold time 5S / 30S / 1min / 3min / 5min / 10min / 20min / 30min
Long press 3s to transmit selected value

● Auto Mode

Short press to set working mode: MD=Motion+daylight threshold; MP=Motion +Daylight priority (daylight switch) ; P= Daylight priority
Long press 3s to transmit selected mode
Note: MP or P is not available for all models, please follow spec. sheet of motion sensor.

● Daylight Threshold

Short press to set Daylight threshold 5Lux / 15Lux / 30Lux / 50Lux / 100Lux / 150Lux / Disable.
Long press 3s to transmit selected value
When set Daylight threshold to Disable, sensor will switch on light when detect motion regardless of ambient brightness level.

● Motion Sensor

Short press to quit from constant on/off mode, sensor start to work (the previous setting stays in validity)

● Dim+/Dim-

Short press "Dim+/Dim-" for dimming, to add or subtract 2% per press
Note: In normal "daylight" mode, set the maximum brightness via Dim+/Dim-, the maximum brightness value should be higher than the stand-by dimming level.

● Reset

Short press to return to factory default setting.

Detection Area	Hold Time	Daylight sensor	Stand-by period	Stand-by dim level
100%	8s	Disable	0s	10%

● S

N/A

● H/L

Short press to set: H (high sensitivity) / L(low sensitivity)
long press 3s to transmit selected value

● 2

2nd optional quick setting, short press to show the setting configuration, long press 3s to save this configuration. Press "Send" to transmit selected quick setting

● 1

1st optional quick setting, short press to show the setting configuration, long press 3s to save this configuration. Press "Send" to transmit selected quick setting

● ON/OFF

Press this button to enter the "constant on/off" mode, this mode without memory function. Press "Reset" or "Motion Sensor" to exit to sensor function mode.

Notes:

Only while the Stand-by period set to "+ ∞" infinity, the light will enter the preset Stand-by dim level after the power is cycled, and run the latest setting mode; In other states, the light will remain fully on for 5 seconds after the power is cycled, and then turn off the light automatically, it will keep off if no motion is detected and run the latest setting mode.