



PROJECT NAME

CATALOG NO.

TYPE

DATE

NOTE

LED BOLLARD WITH ADJUSTABLE WATTAGE AND CCT

BLA Series

Bollards

DESCRIPTION

The BLA Series LED Bollard is a high-performance, IP65-rated luminaire that produces a minimum of 130 lumen per watts, providing significant energy savings while remaining durable in the field. The adjustable wattage and CCT option provide a wide range of lumen packages to replace traditional metal halide lighting from 50W to 100W. With an expected service life of over 20 years of nighttime use and up to 70% in energy savings over comparable 100W metal halide luminaires, the BLA Bollard is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

APPLICATION

The rugged construction and clean lines of the BLA Bollard is ideal for illuminating building entryways, walking paths, and pedestrian plazas, as well as any other location requiring a low mounting height light source with fully cutoff illumination.



SPECIFICATION FEATURES

Construction

One-piece 6-inch round die-casting aluminum shaft with thick side walls for extreme durability, a high-impact clear acrylic lens and welded top cap. Overall height is 42" standard. Rated IP65, suitable for wet locations. 10KV surge protection come in standard.

Finish

Exterior parts are protected by a zinc-infused super durable thermoset powder coat finish that provides superior resistance to corrosion and weathering for maximum retention of gloss and luster. A tightly controlled multi-stage process ensures a minimum 3-mil thickness for a finish that can withstand the elements without cracking or peeling.

Electrical

Light engines consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life. Electrical components are mounted on a removable power tray.

Optics

A fully cutoff asymmetrical distributions. IP65 sealed LED light engine provides smoothly graduated illumination without any uplight.

Certifications / Regulatory

UL/cUL listed. All components used have UL approval. IP65 rated.

Warranty

5-year limited warranty. See complete warranty terms for details.

Quick Ship Product

BLA-R-22A/8A
BLA-S-22A/8A

ORDERING INFORMATION

Sample Number: **BLA-R-22A/8A**

BLA	R	22A	(Blank)	8	A	(Blank)
Series BLA - LED Bollard with Adjustable Wattage and CCT	Form Factor R - Round S - Square	Lumen Package 22A - Adjustable wattage (22/16/12W) <i>*See energy data for details</i>	Input Voltage (Blank) - 120V-277V	CRI 8 - CRI>80	CCT A - Adjustable CCT (5000/4000/3000K)	Beam Angle (Blank) - Asymmetrical

SUMMARY

Input Voltage	120V-277V
Input Power	See energy data for details
Power Factor	> 0.9
THD (Max.)	20%
Efficacy	> 130 LPW
Delivered Lumens	See energy data for details
CRI	> 80
CCT	Adjustable CCT (5000/4000/3000K)
Operating Temp.	-40°F ~ 122°F
Rated Life	70,000 hours
IP Grade	Outdoor, wet locations, IP65 rating
Surge protection	10KV

ENERGY PERFORMANCE DATA


Part No.	Rated Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
BLA-R-22A/8A	22/16/12	2860/2080/1560 ± 5%	130
BLA-S-22A/8A	22/16/12	2860/2080/1560 ± 5%	130

MOUNTING INFORMATION

Round



Square




PHYSICAL PARAMETERS


DIMENSION

BLA-R-22A/8A


BLA-S-22A/8A




6.3" (160mm)

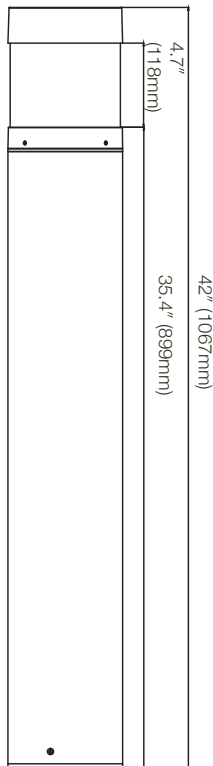

42" (1067mm)
35.4" (899mm)



6.3" (160mm)

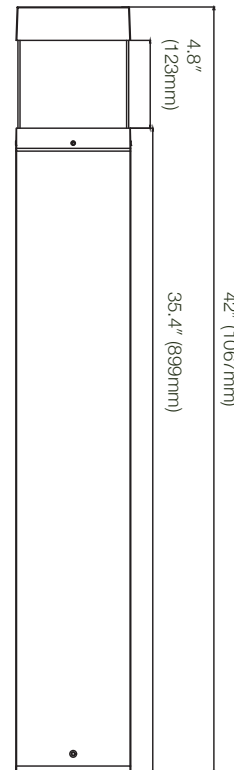

42" (1067mm)
35.4" (899mm)