



PROJECT

TYPE

DATE

ITEM NO.

NOTE

LED ROUND HIGH BAY

RWU Series

High / Low Bays

DESCRIPTION

The Alphalite RWU Series Slim Round LED High Bay delivers high lumen output, long life, economic solution, and no restrike time. This energy-efficient LED luminaire offers one-to-one replacement of existing HID or fluorescent high bays. Precision-formed reflectors delivers adequate light in high mounting applications. Modular driver and LED arrays. Economic solution to optimize payback. Capable of being operated with occupancy sensor

APPLICATION

Various commercial industrial applications with high ceilings: warehouse, manufacturing facilities, retail, gymnasiums, grocery.



SPECIFICATION FEATURES

Benefits

- Attractive ROI
- Lower energy costs
- High quality light for a more productive space

Construction

Rugged die-cast aluminum housing withstands environments without climate control. Outer surface treated with durable powder coating to provide resistance to corrosion, rust, weathering, and UV degradation. Performance-engineered, integral heat dissipation fins and LED thermal substrate provides superior thermal management for long life and reliability.

Electrical

Luminaire utilizes long life, high efficacy LEDs and a highly efficient, reliable LED driver. 120V-277V input voltage for increased versatility. Comes equipped with quick disconnect for compliance with US code.

Mounting

Comes standard equipped with hook mounting.

Optics

One piece precision molded thick polycarbonate. High light reflectivity reflectors. 120° beam angle comes in standard.

Finish

Outer surface treated with durable powder coating in black color to provide resistance to corrosion, rust, weathering, and UV degradation.

Certifications / Regulatory

UL listed. DLC QPL listed. All components have safety approvals.

Warranty

7-year warranty. See complete warranty terms for details.

Quick Ship Product

RWU-100/850

RWU-150/840

RWU-150/850

RWU-240/850

ORDERING INFORMATION

Sample Number: RWU-150/850

Series	Lumen Package		CRI	CCT	Input Voltage	Dimming
RWU - LED Round High Bay	100	200	8 - 80+ CRI	40 - 4000K 50 - 5000K	(Blank) - 120V-277V	(Blank) - 0-10V Continuous Dimming
	-100W, 13500lm	-200W, 27000lm				
	150	240				
	-150W, 20250lm	-240W, 32400lm				
Beam Angle	Accessories		Control Options			
(Blank) - 120°	RWU-RPC - PC Reflector Cone		MMS - Integrated step dimming Microwave motion sensor			

SUMMARY

Input Voltage	120V-277V
Input Frequency	50/60 Hz
Power Factor	> 0.95
THD (Max.)	20%
Efficacy	> 135 LPW
Controls/ Dimming	Full Range 0-10V dimming standard
Dimming Range	10-100%
CRI	80+, R9 > 0
CCT	4000K and 5000K
Operating Temp.	-4°F ~ 120°F (-20°C ~ 49°C)
Rated Life	70,000 hours

ENERGY PERFORMANCE DATA

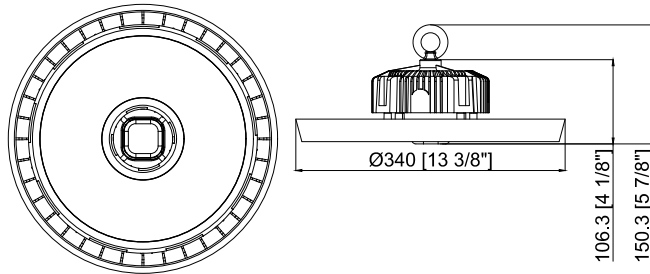
Part No.	Rated Wattage (W)	Tested Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
RWU-100	100	93.86	13500	135
RWU-150	150	140.48	20250	135
RWU-200	200	200	27000	135
RWU-240	240	240	32400	135

*The delivered lumens above are based on highest wattage and 4000K.

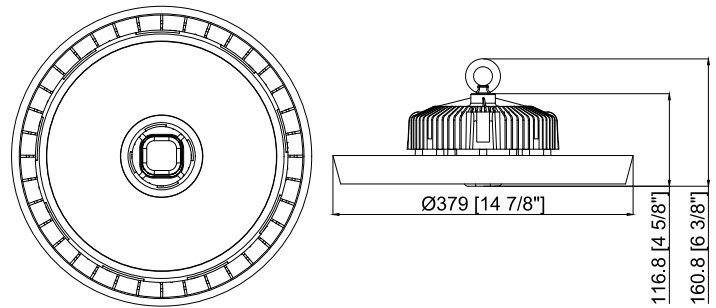
**Default setting at time of shipping are highest wattage and highest CCT.


PHYSICAL PARAMETERS
DIMENSION
RWU-100 & 150

5.95 Lbs.


RWU-200 & 240

9.92 Lbs.


REFLECTOR
PC Reflector Cone

MOUNTING OPTIONS
Hook Mounting


CEILING MOUNTING