



PROJECT

TYPE

DATE

ITEM NO.

NOTE

## LED LINEAR RETROFIT KIT

## RXL Series

Retrofit Kits (DLC Listed)

### DESCRIPTION

The RXL LED Linear Strip Retrofit Kit series combines the benefits of long life, controllability, and energy savings with elegant design and superior quality of light. The RXL retrofit solution optimize LED optics and electronics to deliver energy savings and high performance while being extremely quick and easy to install.

### APPLICATION

Versatile upgrade solution for existing general purpose strip luminaires. Ideal for parking garages, corridors, hallways, stairwells, offices, closets, storage rooms, warehouse, manufacturing facilities, and spaces that demand energy demand reduction and high quality light.

### SPECIFICATION FEATURES

#### Construction

Reflector utilizes highly reflective powder coat finish. PMMA Diffuser lens provides even and consistent light while eliminating pixelation. Tool-less removal of diffuser allows access to LED array. LED module and driver are replaceable. Universal reflector brackets accommodate various strip widths. Easy and convenient installation utilizes existing luminaire body, reduces labor hours. Integrated driver eliminates additional labor. Housing and optics maintain damp location rating with all internal components.

#### Electrical

Luminaire utilizes long life, high efficacy LEDs and a highly efficient, reliable LED driver. 1-10V continuous dimming comes standard. Ideal when used in conjunction with controls and sensors. Comes equipped with quick disconnect for compliance with US code.

#### Finish

Highly reflective finish. Baked white paint, applied after fabrication.

#### Mounting

Installs on existing fluorescent strip fixtures. Utilizes existing luminaire body, eliminating the need to remove and dispose of old hardware. No need to re-mount or re-hang strip fixture. Universal reflector bracket accommodates various fixture widths.

#### Optics

LED light engine and integrated optics delivers enhanced light quality and distribution. Precision-formed diffuser and reflector are designed LED light consistently, reducing glare and pixelation.

#### Certifications / Regulatory

All components used have UL approval. UL Class 2. DLC 5.1 Listed. \*Not all versions of this product may be DLC listed, please check the QPL at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

#### Warranty

7-year limited warranty. See complete warranty terms for details.



### Quick Ship Product

RXL-4L(23S)/840  
RXL-4H(35/25/18S2)/8A  
RXL-4VH(64/56/46S2)/8xx-12V  
RXL-8H(54S)/840 Only  
RXL-8L(54/46/38S2)/8A-PC(-12V)  
RXL-8H(90/75/65S2)/835 and 840  
RXL-8H(90/75/65S2)/8A(-12V)

## ORDERING INFORMATION

Sample Number: RXL-8H(90/75/65S2)/835

Series	Form Factor	Lumen Package		CRI	CCT
RXL - LED Linear Retrofit Kit	8 - 8'	4'	8'	8 - 82+ CRI	35 - 3500K
	4 - 4'	4L(23S) -23W, 2990lm 4H(35/25/18S2) -35/25/18W, 4550/3250/2340lm 4VH(64/56/46S2) -64/56/46W, 8320/7280/5980lm	8L(54/46/38S2) -54/46/38W, 7020/5980/4940lm 8H(54sS) -54W, 7020lm 8H(90/75/65S2) -90/75/65W, 11700/9750/8480lm		40 - 4000K 50 - 5000K A - 5000/4000/3500K Adjustable

Input Voltage	Auxiliary Power DC12V	Accessories	Driver Options
(Blank) - 120-277V C - 120-347V	(Blank) - without AUX 12V - with DC12V (PC diffuser)	LN - Lens (1 for 4', 2 for 8')	CT - Cold temperature driver, 40oF-131oF (-40oC-55oC) Input Voltage: Custom input voltage available Contact your Alphalite representative for added cost, quantities and lead times.

Controls Options	Emergency Backup	Assembly in USA
------------------	------------------	-----------------

PIR - On/off PIR High Bay motion sensor (Field installed required)  
PIRD - On/off PIR high bay motion and daylight sensor (Field installed required)  
OS - Step dimming PIR motion sensor and daylight sensor (Field installed required)  
MMS - Step dimming Microwave Sensor (Motion detection/Photocell/Dimming)  
DMMS-DL - Step dimming Microwave Sensor (Motion detection/Photocell/Dimming/Daylight harvesting)  
DL - Integrated daylight harvesting  
SMC - Smart Control System

Remarks: Sensor configuration tool remote control required,not included

(Lumen will maintain over the 90-minute duration)  
EM2000 - 2000lm

BAA - assembly in USA

## SUMMARY

Input Voltage	120-277V
Input Power	See energy data for details
Power Factor	>0.9
THD (Max.)	<20%
Efficacy	130LPW
Delivered Lumens	See energy data for details
Controls/ Dimming	1-10V dimming standard
Dimming Range	10-100%
CRI	>80
CCT	3500,4000,5000K 3500/4000/5000K Selectable
Operating Temp.	-4°F~133°F (-20°C~55°C)
Rated Life	70,000 hours

## ENERGY PERFORMANCE DATA

Form Factor	Part No.	Rated Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
4'	RXL-4L(23S)/840	23	2990	130
	RXL-4H(35/25/18S2)/8A	35/25/18	4550/3250/2340	130
	RXL-4VH(64/56/46S2)/8xx-12V	64/56/46	8320/7280/5980	130
8'	RXL-8H(54S)/840 Only	54	7020	130
	RXL-8L(54/46/38S2)/8A-PC(-12V)	54/46/38	7020/5980/4940	130
	RXL-8H(90/75/65S2)/835 and 840	90/75/65	11700/9750/8480	130
	RXL-8H(90/75/65S2)/8A(-12V)	90/75/65	11700/9750/8450	130

\*The delivered lumens above are based on highest wattage and 4000K.



\*\*Default setting at time of shipping are highest wattage and highest CCT.

## PHYSICAL PARAMETERS

### DIMENSION

#### RXL- 4

5.38 Lbs.

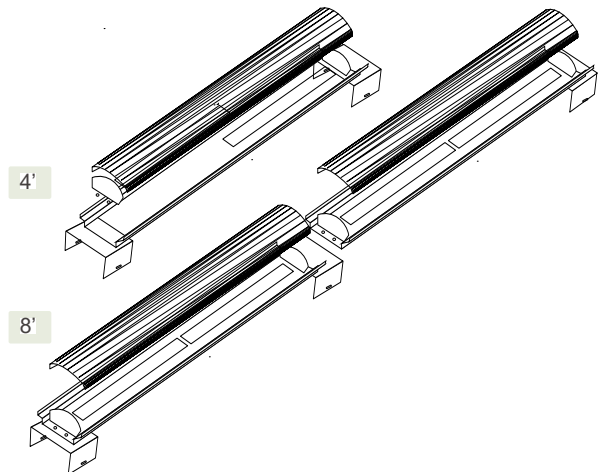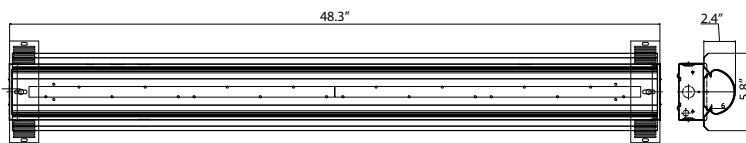

#### RXL- 8

9.26 Lbs.

