



PROJECT

TYPE

DATE

ITEM NO.

NOTE

LED PENDANT AND CEILING MOUNT CYLINDER LIGHT

CLD Series

Cylinder Luminaires

DESCRIPTION

The architectural round cylinder light is a modern and versatile, CCT 5000/4000/3000K adjustable in the field. Made from a single cylinder in extruded aluminum with black powder coat suitable for ceiling surface, pendant mount configurations.

APPLICATION

Indoor Residential or Commercial.



SPECIFICATION FEATURES

Construction

Heavy-gauge extruded aluminum construction. It included quick mount plate for easy and contractor friendly installation.

Electrical

Luminaire utilizes long life, high efficacy LEDs and a highly efficient, reliable LED driver. 120-277V input voltage for increased versatility. Standard Surge Protection: Line to Line 4KV, Line to Ground 6KV.

Optics

Glass lenses provide clear, more efficient light. Comes standard with beam angle 75° as general illumination lighting. 80CRI minimum.

Finish

Outer surface treated with durable powder coating to provide resistance to corrosion, rust, weathering and UV degradation.

Mounting

Ceiling mount and pendant mount for installation to 4" square or octagonal junction boxes. The stems comes standard 4ft length (1ft connectable stem x 4 pcs).

Certifications / Regulatory

cULus listed for dry and damp locations rated.

Warranty

5-year limited warranty. See complete warranty terms for details.

Quick Ship Product



ORDERING INFORMATION

Sample Number: **CLD-13/8A**

Series	Lumen Package			CRI	CCT	Input Voltage
CLD - LED Cylinder	13 - 3", 13W, 1690lm	20 - 4", 20W, 2600lm	33 - 6", 33W, 4290lm	8 - 80CRI	A - Adjustable CCT (5000/4000/3000K)	(Blank) - 120-277V

Optics	Mounting type	Color
(Blank) - 75° Beam angle	(Blank) - Ceiling Mount PM - Pendant mount with 4ft rigid stem	(Blank) - Black

SUMMARY

Input Voltage	120-277V
Input Power	See energy data for details
Power Factor	> 0.90
THD (Max.)	<20%
Efficacy	130 LPW
Delivered Lumens	See energy data for details
Controls/ Dimming	0-10V dimming
CRI	> 80
CCT	5000/4000/3000K Selectable
Operating Temp.	-40°F~104°F (-40°C ~40°C)
Rated Life	50,000 hours
IP Grade	IP20


ENERGY PERFORMANCE DATA

Part No.	Rated Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
CLD-13/8A	13	1690	130
CLD-20/8A	20	2600	
CLD-33/8A	33	4290	

*The delivered lumens above are based on highest wattage and 4000K.

**Default setting at time of shipping are highest wattage and highest CCT.

OPTICS





PHYSICAL PARAMETERS

DIMENSION



Ceilin Mount

Pendant Mount

CLD-13

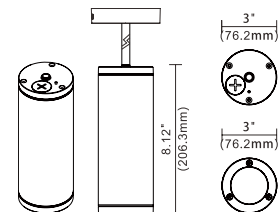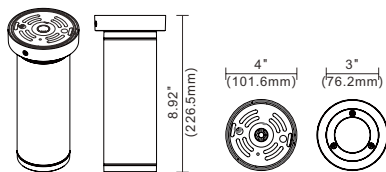

CLD-20

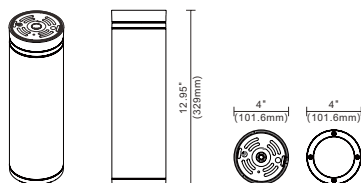

CLD-33

