Alphalite Inc.

PROJECT			
TYPE		DATE	
ITEM NO.			
NOTE			

EMERGENCY EXIT SIGN LIGHT WITH DUAL HEAD


EML-EX Series

Exit sign light

DESCRIPTION

The EML Series is Emergency Exit Sign integrates reliable emergency egress signage with a durble, low-profile design for commercial applications. It is equipped with Dual head angle-adjustable LED lamp for directional emergency illumination. Single or double sided face, included mounting hardware support quick ceiling, back wall mount installation, and icludes a test switch and charge indicator for easy maintenance.

APPLICATION
Office buildings, schools, healthcare facilities, retail stores, hospitality spaces, multifamily residential corridors and other commerial indoor egress areas.

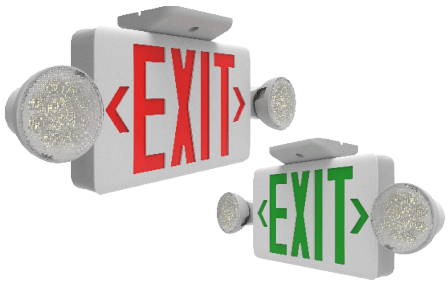

5 YEAR WARRANTY

c UL us LISTED

Quick Ship Product

SPECIFICATION FEATURES

Construction
Injection molded thermoplastic ABS housing, UL94-V0 flame-retardant, fire-resistant. Face can be field installation from single to double faced.

Electrical
120-277V input, built-in Li-ion battery packup to provide minimum 90 minutes of run time when AC power is lost, Dual head provide more than 400 lumens of illumination in emergency mode.

Optics
Full illuminated 6" characters, field selectable green or red sign capability standard on all units.

Finish
Comes standard with white color housing, black finish optional.

Mounting
Universal knockout pattern on back plate for single face back wall mount, canopy included for ceiling mount installation.

Certifications
cULus, CEC Title 20 compliant, meets NFPA 101 Life Safety Code, NEC, OSHA.

Warranty
5-year limited warranty. See complete warranty terms for details.

ORDERING INFORMATION

Sample Number: EML-EX-4.4L-DF-RD-WH

Series	EX	Emergency Lumen package	Light-emitting Face
EML - Emergency Light	**EX** - Exit Sign	**4.4L** - 3.5W, 440lm	**SF** - Singl Face **DF** - Double Face*

*Double face not available for back wall mount

Letter Color	Finish	Options
RD - Red **GN** - Green	**WH** - White **BK** - Back**	**(Blank)-** without Tamper-Proof hardware **TP** - Tamper-Proof hardware

**Custom color: adder cost and extended lead time


SUMMARY

Input Voltage	120-277V
Emergency power	3.5W
Material	ABS Plastic
Max. Mounting Height	16.8’
Battery	Built-in 7.4V, 1000mAh Li-ion battery
Charging time	24 hours
Discharge time	90 minutes
Operating Temp.	41°F~+122°F (5°C ~ +50°C)
Rated Life	50,000 hours
IP Grade	IP20

ENERGY PERFORMANCE DATA

Part No.	Rated Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
EML-EX-4.4L-XX	3.5	440	125

OPTICS



AVERAGE BEAM ANGLE(50%):36.1 DEG

PHYSICAL PARAMETERS

DIMENSION

