



PROJECT

TYPE

DATE

ITEM NO.

NOTE

ARCHITECTURAL LED LINEAR-DIRECT & INDIRECT

ILA-DIDE Series

LED Linear Luminaire

DESCRIPTION

The AlphaLite ILA Series makes it an ideal choice for size-restricted architectural applications. The ILA Series can be the illumination solution in commercial, industrial, retail, and residential applications. Fixtures can be used in storage/utility areas, coves, display cases, shops, tasks, and general area lighting.

APPLICATION

A versatile solution for general purpose applications. Ideal for parking garages, corridors, hallways, stairwells, offices, closets, storage rooms, and spaces that demand energy demand reduction and high-quality light.

SPECIFICATION FEATURES

Benefits

- Lower installation costs and maintenance costs
- Lower energy costs
- High quality light for a more productive space
- Multiple mounting options
- Convenient access to replaceable, standard components reduces life cycle costs
- Field adjust wattage & CCT and direct/indirect proportion light output, all 3 dip switches with 3 positions, total 27 options

Construction

Housing constructed of extruded aluminum. Polycarbonate diffuser lens provides even and consistent light while eliminating pixelation and glare. Toolless removal of diffuser allows access to LED array. LED module and driver are replaceable. Housing and optics maintain damp location rating with all internal components.

Finish

Highly reflective finish. Baked paint applied after fabrication.



Electrical

120-347V input voltage for increased versatility. 0-10V continuous dimming comes standard. Ideal when used in conjunction with controls and sensors. Comes equipped with a quick disconnect for compliance with US code.

Optics

The LED light engine and integrated optics deliver enhanced light quality and distribution. Diffuser and reflector are designed LED light consistently, reducing glare and pixelation. The beam angle of direct light is 110°.

Certifications / Regulatory

cETLus listed, IC rated.

Warranty

5-year limited warranty. See complete warranty terms for details.

Quick Ship Product

ILA-4DIDE(50)-8AK-SA

ILA-8DIBE(100)-8AK-SA

ORDERING INFORMATION

Series	Length	Lumen Package			CRI	CCT
ILA	2 - 2'	2'	4'	8'	8 - 80+ CRI	AK - Adjustable CCT
- Architectural	4 - 4'	2DIDE(30)	4DIDE(50)	8DIDE(100)	9 - 90+ CRI	(4000/3500/3000K)
LED Linear	8 - 8'	- 30/25/20W, 3450/2875/2300lm	- 50/40/30W, 5750/4600/3450lm	- 100/80/60W, 11500/9200/6900lm		

Note: check the details as energy performance data.

Optics	Control Option	Emergency Backup	Color	Assembly in USA
(Blank) - Diffuser with 110°x110° P - Parabolic lens (UGR<19) BA - Batwing distribution WW - Wall Wash distribution *WW only available for direct light	OS - Step dimming PIR motion sensor and daylight sensor MMS - Step dimming Microwave Sensor and daylight sensor SMC - Smart Control System Remarks: Sensor configuration tool remote control required, not included	EM15W - 15W constant power with integrated self-diagnostic test EM700 - 700lm EM1400 - 1400lm EM2000 - 2000lm	WH - White BK - Black SA - Silver	(Blank) - Non-BAA BAA - Assembly in USA

Accessories

Connector

ILA-LDIDB(30) - L shape connector

ILA-TDIDB(40) - T shape connector

ILA-XDIDB(50) - X shape connector

ILA-CRD7-(WH/BK) - 7ft 5 cords AC cable in (white or black) color with connector

ILA-CRD13-(WH/BK) - 13ft 5 cords AC cable in (white or black) color with connector

ILA-CRD7-300-EM-(WH/BK) - 7ft 6 cords 300V AC cable in (white or black) color with connector

ZCN-ILA-xFT - Fixture end connector kit, x=ft

ILA-UCOVER-(WH/BK) - U cover for connection, 100% no light leak

Mounting

Suspension Mount

ILA-ACC-(6/12) - 6.5ft or 12ft Aircraft cable without canopy

ILA-PSCA-CRD7-(WH/BK) - Canopy with AC cable K/O + AC cable + 6.5ft aircraft cable

ILA-SCA-(WH/BK) - Canopy + 6.5ft aircraft cable

Pendant Mount

ILA-PMK-(WH/BK) - Pendant mount kit, suitable for 3/8" and 1/2" OD stem (Stems not provided)

Wall Mount

ILA-WMKB-(WH/BK) - B version wall mount kit (Factory modification required)

ILA-WMKC-xFT-(WH/BK) - C version wall mount kit

AlphaLite Inc.

11920 Altamar Place, Santa Fe Springs, CA 90670

Tel: 888.287.9228 | Fax: 888.258.9183 | support@alphalite.com | www.alphalite.com

Page 1 of 4

SUMMARY

Input Voltage	120-347V
Input Power	20-100W
Efficiency	>100LPW
Color Temp.	4000K/3500K/3000K Selectable
CRI	>80
Power Factor	>0.90
Dimmable	Full Range 0-10V dimming standard
Dimming Range	10-100%
Operating Temp.	-22°F to 122°F (-30°C to 50°C)
Rated Life	50,000 hours

DIP SWITCHES

ILA-2

CCT 3000K	↑	Down+Up 100%+0%	↑	Watt 25W
3500K	•••	Down+Up 50%+50%	•••	20W
4000K CCT	↓	Down+Up 70%+30%	↓	15W Watt

ILA-4

CCT 3000K	↑	Down+Up 100%+0%	↑	Watt 50W
3500K	•••	Down+Up 50%+50%	•••	40W
4000K CCT	↓	Down+Up 70%+30%	↓	30W Watt



ILA-8


CCT 3000K	↑	Down+Up 100%+0%	↑	Watt 100W
3500K	•••	Down+Up 50%+50%	•••	80W
4000K CCT	↓	Down+Up 70%+30%	↓	60W Watt

ENERGY PERFORMANCE DATA


Part No.	Housing Finish	Rated Wattage(W)	Delivered Lumen(lm)	Efficacy (lm/W)
ILA-2DIDE(30)-8AK	WH	30/25/20	3450/2875/2300	115
	BK		3090/2575/2060	103
	SA		3270/2725/2180	109
ILA-4DIDE(50)-8AK	WH	50/40/30	5750/4600/3450	115
	BK		5150/4120/3090	103
	SA		5450/4360/3270	109
ILA-8DIDE(100)-8AK	WH	100/80/60	11500/9200/6900	115
	BK		10300/8240/6180	103
	SA		10900/8720/6540	109

OPTICS


Standard Diffuser




Parabolic



Batwing




Wall Wash




PHYSICAL PARAMETERS

DIMENSION

ILA-2

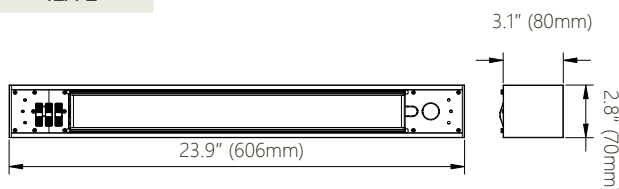


ILA-4

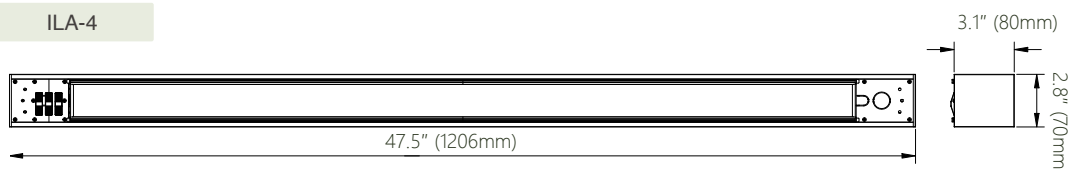


DIMENSION


ILA-8

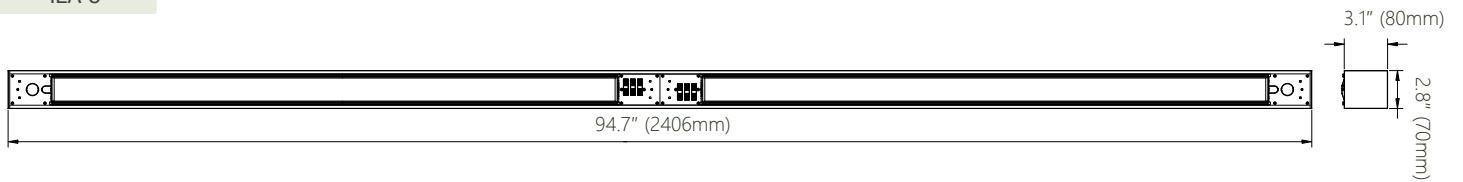


ILA-L

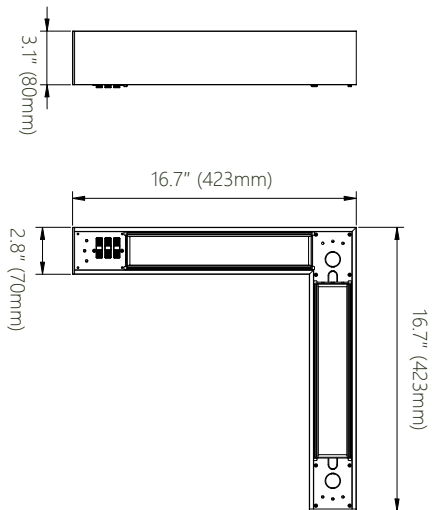


ILA-T

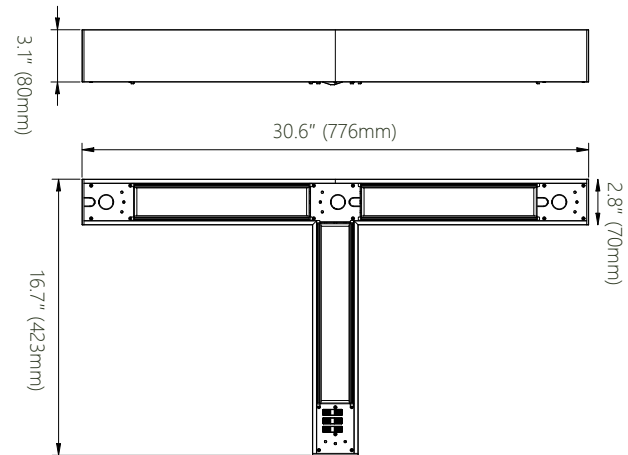


ILA-X

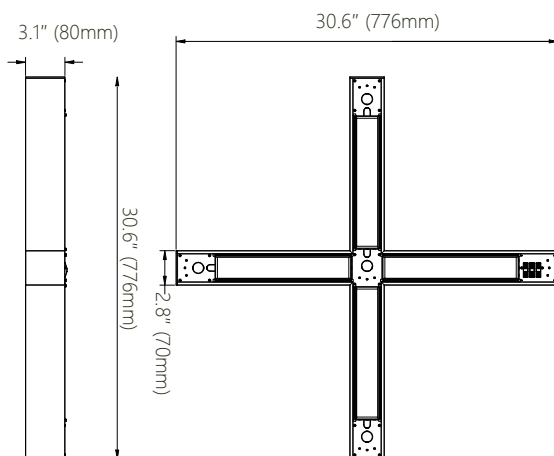


LINEAR MULTI-DIRECTIONAL LAYOUT

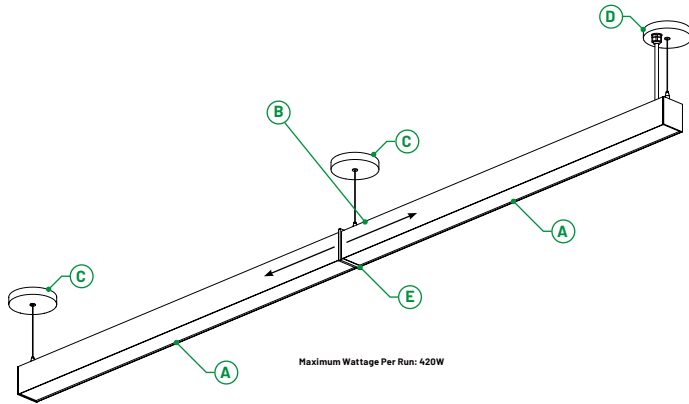

	Part Number	Description	Quantity
A	ILA-2/4/6/8ft	ILA Linear Direct/Indirect Fixture	2
B	ZCN-ILA-xFT	Fixture End Linkable Connector Kit, x=ft	1
C	ILA-SCA	Surface Canopy + 6.5ft Aircraft Cable	2
D	ILA-PSCA-CRD7	Surface Canopy with AC cable K/O + 6.5ft Aircraft Cable + 18CWG 600V 5 wires 7ft AC Cable	1
E	ILA-UCOVER	U-cover(Optional)	1

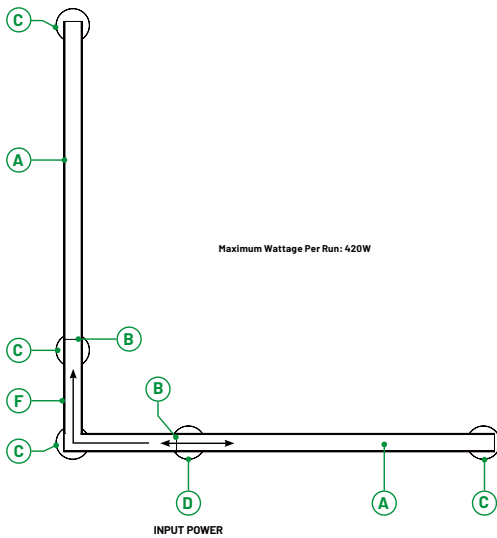

	Part Number	Description	Quantity
A	ILA-2/4/6/8ft	ILA Linear Direct/Indirect Fixture	2
B	ZCN-ILA-xFT	Fixture End Linkable Connector Kit, x=ft	2
C	ILA-SCA	Surface Canopy + 6.5ft Aircraft Cable	4
D	ILA-PSCA-CRD7	Surface Canopy with AC cable K/O + 6.5ft Aircraft Cable + 18CWG 600V 5 wires 7ft AC Cable	1
F	ILA-LDXXX	L-Connector	1

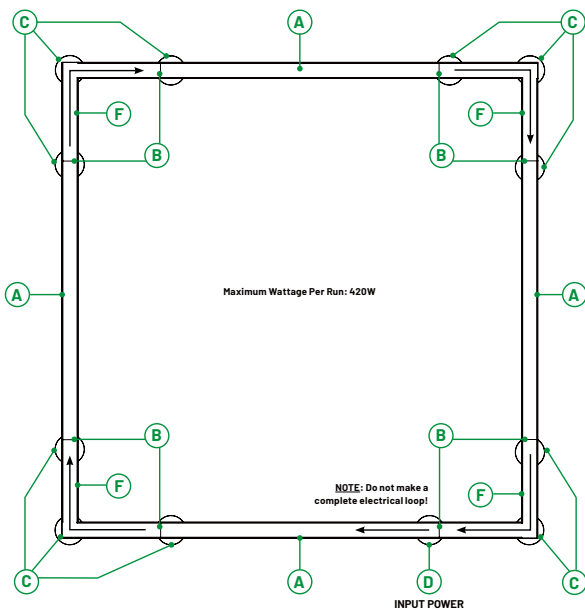

	Part Number	Description	Quantity
A	ILA-2/4/6/8ft	ILA Linear Direct/Indirect Fixture	4
B	ZCN-ILA-xFT	Fixture End Linkable Connector Kit, x=ft	8
C	ILA-SCA	Surface Canopy + 6.5ft Aircraft Cable	11
D	ILA-PSCA-CRD7	Surface Canopy with AC cable K/O + 6.5ft Aircraft Cable + 18CWG 600V 5 wires 7ft AC Cable	1
F	ILA-LDXXX	L-Connector	4